





Mask TOP BEST

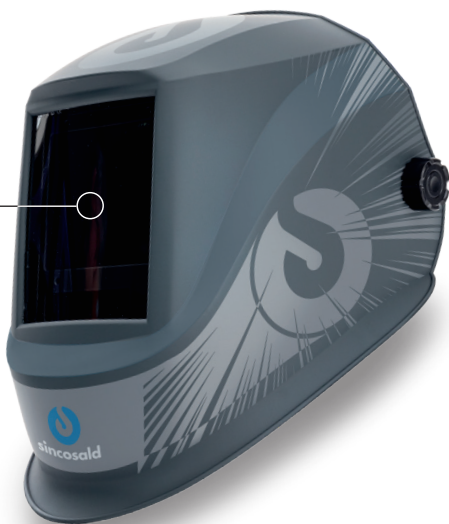

Main features

- MIG/MAG – MMA – TIG - PLASMA
- Liquid crystal filter
- Solar cells - LITHIUM batteries
- Maximum user comfort
- Maximum face - neck protection
- Large viewing area
- Internal DIN adjustment
- Sensitivity adjustment
- Delay adjustment
- Grinding function
- Internal adjustable helmet
- Optional accessories

- Structural steelwork
- Building
- Repair & maintenance
- Civil engineering
- Naval engineering

TOP BEST mask

Top Best series masks are designed for eye and face protection from sparks, weld splatter and harmful radiation during normal welding operations.

Top Best combines high technical performance, comfort and innovative design making it an auto-dimming mask suitable for all welding processes.

Through liquid crystal filter (LCD) technology, the fully digital control allows easy adjustment of the degree of dimming (DIN 9-13), sensitivity and delay.

The 4 sensors transmit maximum precision and reactivity providing greater safety to the operator, even during grinding operations (GRINDING).

The innovative and comfortable headband allows you to adjust the position of the mask with the utmost care and to wear it perfectly.

ADF saving mode automatically turns off the auto-dimming filter when the light intensity is lower than 3 Lux and turns it back on it when lighting exceeds 10 Lux, putting itself in Stand-by.

In work environments where the temperature exceeds 120° C, the intelligent filter locks in a darkened condition, guaranteeing complete safety for the welder operating in extreme conditions.

The **Top Best** series is built according to current **EN 175** European standards and **EN379 1/1/1/1** classified establishing the maximum quality level.



Mask

TOP BEST

Technical data

Description	TOP BEST
Viewing area (mm)	100 x 60
Filter dimensions (mm)	114 x 133 x 9.5
Clear shade	DIN 4
Adjustment	DIN 9 - 13
UV/IR Protection	Up DIN 15
Time from light to dark	1/10000
Time from dark to light	0.1 – 0.9 s
Sensitivity/Delay	Adjustable
Power supply	Solar cells - LITHIUM batteries
Operating temperature	-10° - 55°C (14F - 131F)
Warranty	2 years
Grinding function	YES
Classification	1/2/1/1
Batteries	2 CR2450
Sensors	4

Accessories

Description	Codes
Top Best complete mask	1,700,361
Filter	1,700,360
Internal window	1,700,362
External window	1,700,354
Helmet	1,700,355
Complete headband	1,700,363
Sweat band	1,700,357
Filter holder frame	1,700,358
Battery cover	1,700,359